


The **DRS-215**° is equipped with a connection kit for each drawer and all the connectors necessary to link the most important endoscopes brands available on the market.









if the endoscope is removed without authorization (operator ID) the system generates an on/off warning at the facility where it is installed. (It also works independently, e.g. acoustic signal).







The universal trolley is designed on completion of the system. It can store up to 5 trays, available in the version

without door, with glass door o steel one.



MEDICAL DEVICES GROUP Srl

Via G.Fracastoro, 1 48124 Ravenna (RA)
Tel +39 0544 1826013 - Fax +39 0544 1826015
www.mdg-srl.com - info@mdg-srl.com



Complies with the Directive 93/42/CEE Annex

DRS-215®

drying cabinet for the storage and aseptic transport of flexible endoscopes validated for 800 hours







DRS-215®

COMFORTABLE WORK SURFACE

drying cabinet for the storage and aseptic transport of flexible endoscopes validated for 800 hours

10 DRAWERS TO STORE ENDOSCOPES

The **DRS-215**° is an air-heated cabinet managed by a PLC through a 7" 16:9 HD touch screen display. Designed to store up to 10 flexible endoscopes aseptically and horizontally up to 800

Compliance with standards UNI EN 16442, Class I. Independent monitored flow rate of the endoscopes channels.

The **traceability software** provides access to the most important hospital computer systems through Bluetooth or Ethernet connection.

BARCODE OR RFID USE

The comfortable work surface and its 10 independent drawers allow a versatile use of the system as well as reducing cross infection risks.

7" 16:9 HD DISPLAY



The **DRS-215**° directly connected to l'**E-BAG**° (mdg Patent), provides high security storage and aseptic transportation of flexible endoscopes.

The system is particularly suitable for gastroenterology, bronchoscopy, respiratory clinics, or where requires.

The drying cabinet can be used with or without our certified **E-BAG**°, or in other different condition depending on the instruments to store.



The **DRS-215**° is fully compliant with UNI EN 16442.

It preserves the correct sterile air flow pressure inside each drawers in every condition avoiding cross infection risks, foundations of the norm (Checked and controlled by





POWER SUPPLY


ETHERNET PORT IEDICAL-GRADE AIR CONNECTION



The **DRS-215**° is provided with standard Ethernet connection and the traceability software, which saves all data of the storage process.

The same software is used as interface with the most important hospital traceability systems.



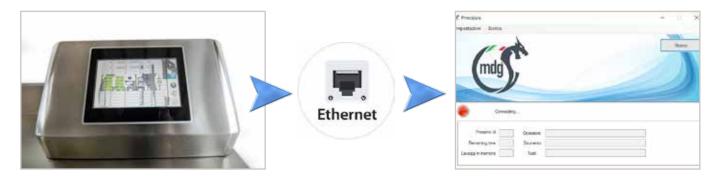

The **DRS-215**° printer can be used to track cycles if the Ethernet connection is unavailable.

For a proper operation a standard electrical connection is sufficient, no obligation of additional connections or electrical wirings.







INTEGRATED PRINTER

FRONT ACCESS FOR SERVICE

POWER SUPPLY